

CHARLESTON

1229BP - 1229CH - 1229R3 - 1229R5 - 1230BP - 1230CH - 1230R3 - 1230R5

1237BP - 1237CH - 1237R3 - 1237R5 - 1238BP - 1238CH - 1238R3 - 1238R5

Post Top

Sitescape[®]

SITE • ROADWAY • AREA LIGHTING



1230BP

H: 43 1/2"

W: 18 1/4"

FITTER: 3" I.D.

Finish: Black (BLK)

Hanover[®]


LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **1230BP**
 dimensions: **H: 43 1/2" W: 18 1/4"**
 E.P.A.: **3.26**
 max. weight: **46 lbs.**

- Three piece cast aluminum vent cap assembly.
- Cast aluminum hinged roof for easy relamping.
- Four extrudedalumin cage legs welded to top and bottom cage frames.
- Prismatic polycarbonate panels shown.
- Panels secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside ast aluminum moisture proof ballast housing.
- Six 5/16-18 stainless steel set screws supplied for locking lantern to 3" dia. post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

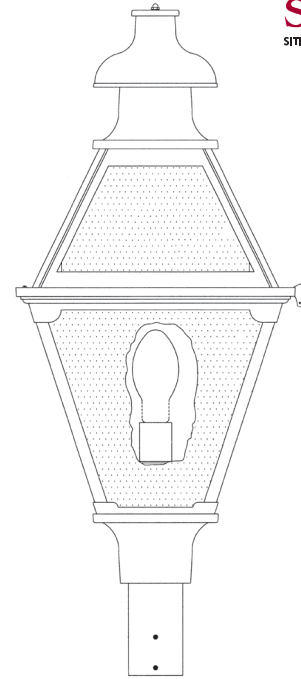

PRODUCT INFORMATION

Order Example:

HPS 1230BP BLK PP 100 120 83 10



- 1** Source
- 2** Model No.
- 3** Finish
- 4** Panels
- 5** Wattage / Socket
- 6** Voltage
- 7** Optics
- 8** Photoeye

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
 High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
 Metal Halide (MH) - 70W, 100W, 150W, 250W
 LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic CP - Clear Polycarbonate
 OA - Opal Acrylic OP - Opal Polcarbonate
 PP - Prismatic Polycarbonate

Voltage

120, 208, 240, 277

Optics


81 - 6" Refractor Type V83 - 8" Refractor Type V
 82 - 6" Refractor Type III 84 - 8" Refractor Type II

Photoeye

10 - 120V only
 11 - 208/277V (Must be installed in post only)

To ensure prompt and efficient processing of your order,
 Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

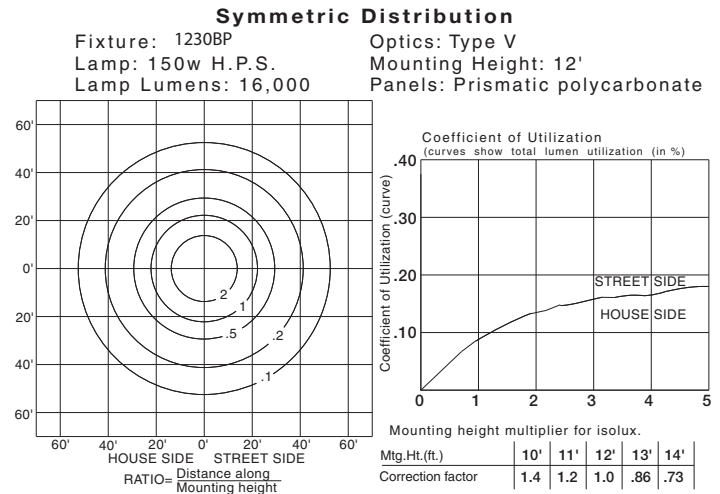

PRODUCT VISUAL INDEX

