



B17430
Verde

B17270
Verde

B17460
Verde

B172FSM
Verde

Ordering Guide

2 B17460 VGN CTP MED

2 - Quantity

B17460 - Model Number

VGN - Finish Code

CTP - Panel/Globe Code

MED - Wattage, Lamping or other options

All products are made to order, please consult factory for lead time.

Clifton Park

B17200 – small

B17400 – medium

Standard on all fixtures below:

- Porcelain medium base socket - (17200 - 8" dia. - 60w max., 17400 - 11" dia. - 100w max)
- Clear textured UV stabilized polycarbonate globe
- Cast aluminum construction
- All finishes available, see page 80

B17260 H: 17 3/4" W: 8 1/4"	B17270 H: 24 1/4" W: 8 1/4" EXT: 10 5/8" T/O: 20"	B17275 H: 29 1/2" W: 8 1/4" EXT: 10 5/8" T/O: 20"	B172FSM H: 20 1/2" W: 8 1/4" EXT: 10 5/8" T/O: 14 1/8"	B17230 H: 20 3/4" W: 8 1/4" Post NOT Included	B17460 H: 25 5/8" W: 10 7/8"	B17470 H: 30 1/4" W: 10 7/8" EXT: 13 1/2" T/O: 25 1/8"	B17475 H: 34 1/2" W: 10 7/8" EXT: 13 1/2" T/O: 25 1/8"	B174FSM H: 27" W: 10 7/8" EXT: 15 1/2" T/O: 17"	B17430 H: 25 1/2" W: 10 7/8" Post NOT Included


CLIFTON PARK

17210WA - 17410WA - 17470BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING

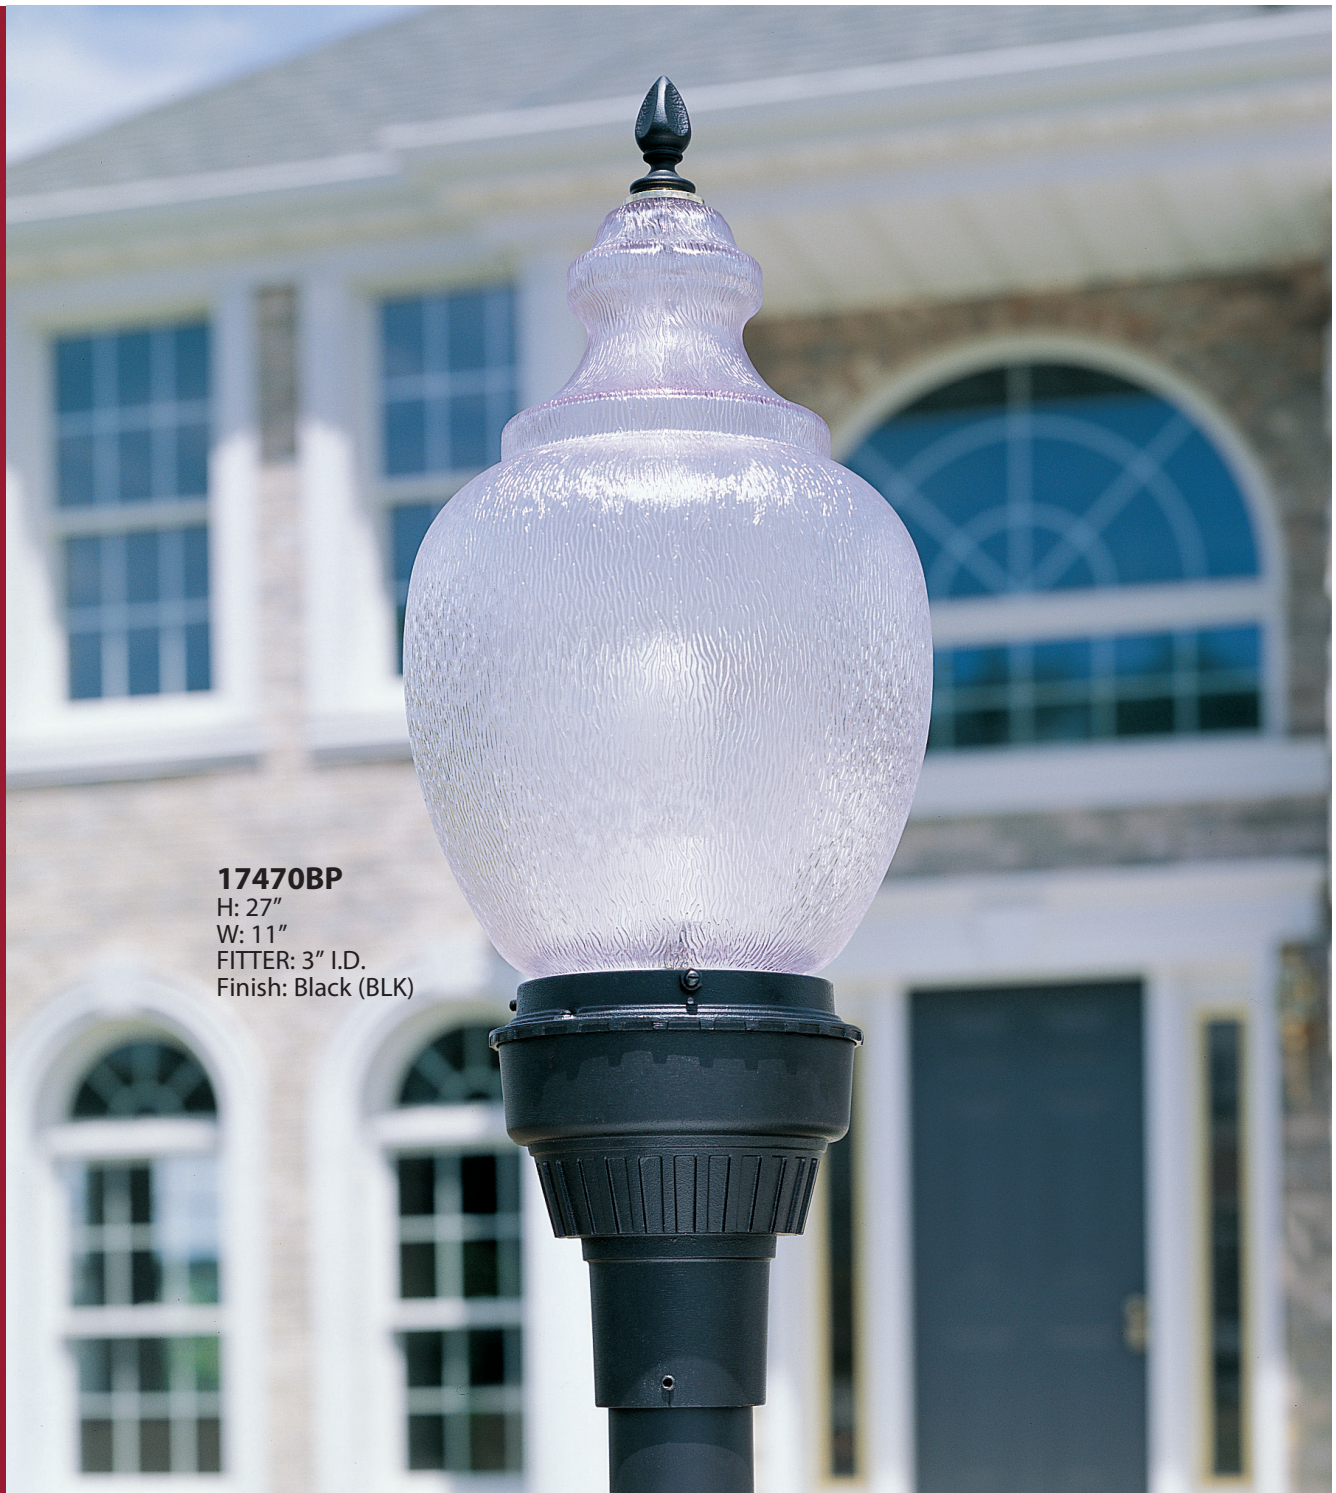

17470BP

H: 27"

W: 11"

FITTER: 3" I.D.

Finish: Black (BLK)

Hanover®
LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **17470BP**


dimensions: **H: 27" W: 11"**

E.P.A.: **1.19**

max. weight: **25 lbs.**

- Cast aluminum finial.
- Brass check ring.
- Porcelain medium base 4kv rated socket. (lamp not supplied)
- 10-7/8" dia. decorative globe w/6" dia. molded neck.
- Clear ripple textured polycarbonate UV stabilized.
- Three stainless steel set screws secure globe, to holder.
- 3 ea. hex stainless steel nuts supplied to lock set screws in place.
- Two stainless steel screws fasten housing together.
- 2 pc. cast aluminum moisture proof ballast housing.
- Ballast & related components are factory installed, prewired and tested.
- Three stainless steel set screws secure lantern to post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed. ISO 9001: 2008

Sitescape
SITE • ROADWAY • AREA LIGHTING

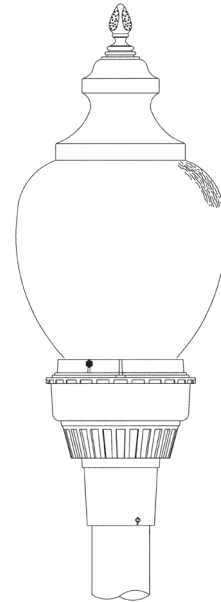

PRODUCT INFORMATION

Order Example:

HPS 17470BP BLK 100 120

- | | | | | |
|----------|-----------|----------|------------------|----------|
| 1 | 2 | 3 | 4 | 5 |
| 1 | Source | 4 | Wattage / Socket | |
| 2 | Model No. | 5 | Voltage | |
| 3 | Finish | | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 50W, 70W, 100W, 150W, 175W
Metal Halide (MH) - 50W, 70W, 100W, 150W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Globe

Clear Textured Polycarbonate

Voltage



120V, 208V, 240V, 277V

PHOTOMETRIC DATA

Symmetric Distribution

Fixture: 17470BP
Lamp: 100w H.P.S.
Lamp Lumens: 9,500


Optics: Type V
Mounting Height: 12'
Globe: Textured polycarbonate

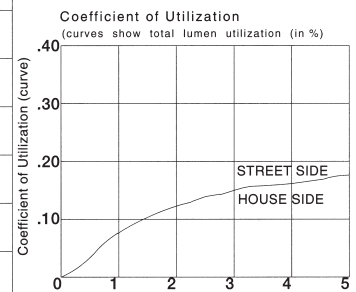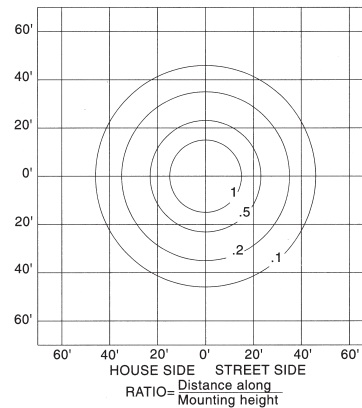


Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73

PRODUCT VISUAL INDEX



17210WA
H: 19 1/2"
W: 7"
PROJ: 14"
T/O: 12 1/4"



17410WA
H: 26 1/2"
W: 11"
PROJ: 15 1/2"
T/O: 18 1/2"



17470BP
H: 27"
W: 11"
EPA: 1.19
Fitter: 3" I.D.

To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

Hanover
LANTERN
Handcrafted in America