

B7922
Black



B7999
White



B7830
Black



B7909
Black



Ordering Guide

4 B7909 BLK OA MED

4 - Quantity
B7909 - Model Number
BLK - Finish Code
OA - Panel/Globe Code
MED - Wattage, Lamping
or other options


*All products are made to order,
please consult factory for lead time.*

Gemini

B7919 & B7999 – small
B7900 – medium
B7800 – large

Standard on all fixtures below:

- (1) Candelabra socket (B7999) 40w max.
- Porcelain medium base single socket (B7919) 60w max.
- Two medium base sockets 75w max.
- Opal acrylic panels standard (acrylic only)
- All finishes available, see page 80
- Cast aluminum construction

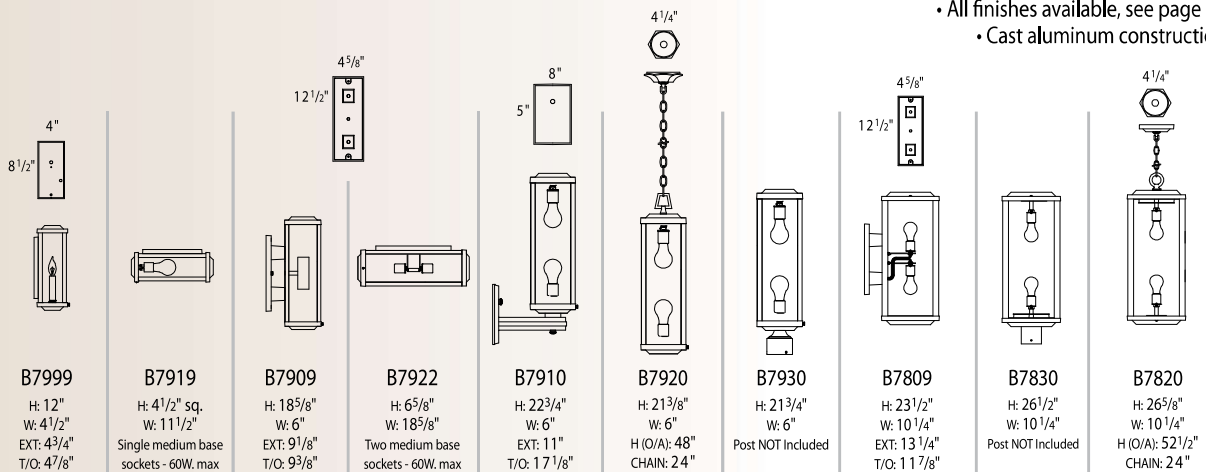

GEMINI

7809IB - 7832BP - 7909IB

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



7832BP

H: 27"

W: 10"

FITTER: 3" I.D.

Finish: Architectural Bronze (ARB)

Hanover®


LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **7832BP**
dimensions: **H: 27" W: 10"**
E.P.A.: **1.70**
max. weight: **30 lbs.**

- Two 8-32 brass screws hold roof to integral cast aluminum top frame.
- Cast aluminum roof.
- Four cast aluminum cage legs welded to cage frame and bottom housing.
- Opal acrylic panels are held secure by slots in cage legs.
- Porcelain base 4kv socket. (lamp not supplied)
- Cast aluminum moisture proof ballast compartment top housing.
- Cast aluminum bottom cage housing.
- Aluminum pipe post fitter to slip over 3" dia. post or tenon.
- Three 5/16-18 stainless steel set screws secure lantern to post or tenon.
- ETL and cETL listed.

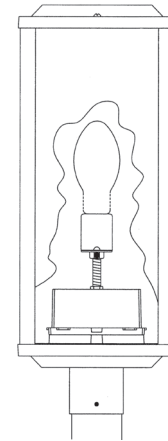

PRODUCT INFORMATION

Order Example:

HPS 7832BP BLK CP 100 120 81 10

- | | | | | | | | |
|--------------------|----------|----------|----------|---------------------------|----------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 Source | | | | 5 Wattage / Socket | | | |
| 2 Model No. | | | | 6 Voltage | | | |
| 3 Finish | | | | 7 Optics | | | |
| 4 Panels | | | | 8 Photoeye | | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic	CP - Clear Polycarbonate
OA - Opal Acrylic	OP - Opal Polcarbonate
PP - Prismatic Polycarbonate	

Voltage

120, 208, 240, 277

Optics (optional)


80 - 4" Refractor Type V*	83 - 8" Refractor Type V***
81 - 6" Refractor Type V **	84 - 8" Refractor Type II***
82 - 6" Refractor Type III**	

Photoeye (optional)

10 - 120V only
11 - 208/277V (Must be installed in post only)

***For 7909IB only **For 7800 series only ***For 7900 series only**
To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.


PHOTOMETRIC DATA

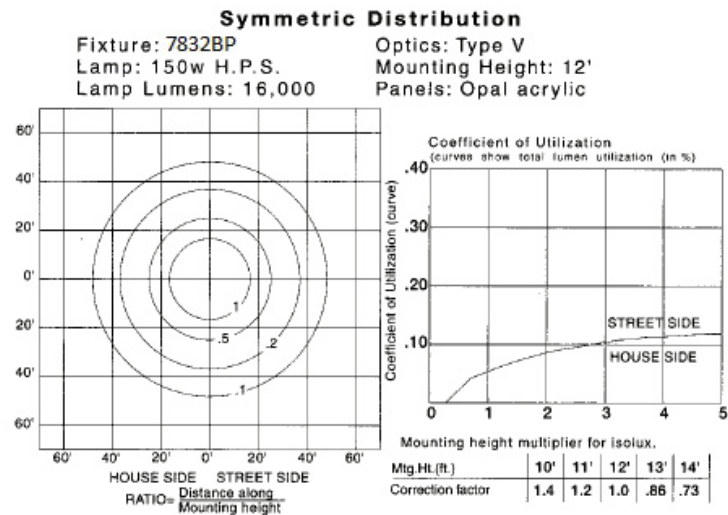

PRODUCT VISUAL INDEX



7909IB
H: 20"
W: 6 1/4"
Proj: 9"
T/O: 10"



7809IB
H: 24"
W: 10"
Proj: 13"
T/O: 14"



7832BP
H: 27"
W: 10"
EPA: 1.70
Fitter: 3" I.D.