

GOTHAM

14209IB - 14230BP - 14409IB - 14430BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



14430BP

H: 40"

W: 15"

FITTER: 3" I.D.

Finish: Shadow Rust (SRT)

Hanover®


LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **14430BP**
dimensions: **H: 40" W: 15"**
E.P.A.: **2.28**
max. weight: **40 lbs.**

- Cast aluminum finial.
- Cast aluminum top cap.
- Cast aluminum roof neck and cap.
- Cast aluminum octagonal roof secures to cage with two screws.
- Extruded aluminum vertical cage legs securely welded to top cage frame and octagonal cage bottom to form an one piece unit.
- Eight opal acrylic panels held secure by slots in cage legs shown.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts located inside cast aluminum bottom housing.
- Three stainless steel 5/16-18 set screws secure lantern to post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

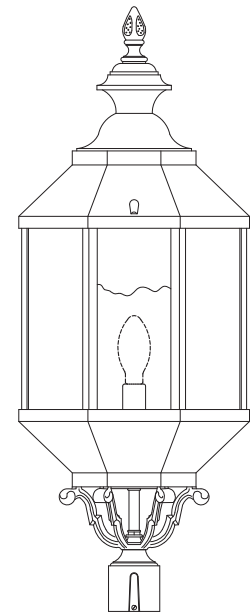

PRODUCT INFORMATION

Order Example:

HPS 14430BP BLK CP 100 120 83 10

- | | | | | | | | |
|--------------------|----------|----------|----------|---------------------------|----------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 Source | | | | 5 Wattage / Socket | | | |
| 2 Model No. | | | | 6 Voltage | | | |
| 3 Finish | | | | 7 Optics | | | |
| 4 Panels | | | | 8 Photoeye | | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic	CP - Clear Polycarbonate
OA - Opal Acrylic	OP - Opal Polcarbonate
PP - Prismatic Polycarbonate	

Voltage

120, 208, 240, 277

Optics (optional)

81 - 6" Refractor Type V84 - 8" Refractor Type III	
82 - 6" Refractor Type III	96 - 6" Refractor Type III*
83 - 8" Refractor Type V97 - 6" Refractor Type V*	

Photoeye (optional)

10 - 120V only
11 - 208/277V (Must be installed in post only)



***For 14200 series only**

To ensure prompt and efficient processing of your order, Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution

Fixture: 14430BP
Lamp: 150w H.P.S.
Lamp Lumens: 16,000
Optics: Type V
Mounting Height: 12'
Panels: Opal acrylic

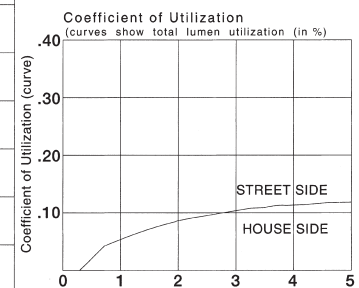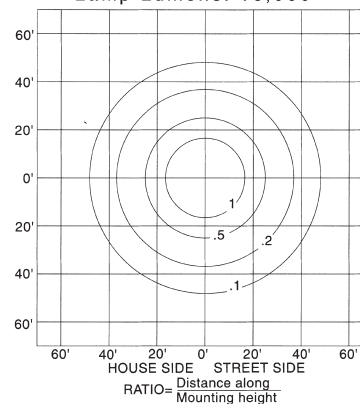

Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73


PRODUCT VISUAL INDEX



14209IB
H: 27"
W: 10"
Proj: 12 3/4"
T/O: 14 1/2"



14230BP
H: 28 1/4"
W: 10"
EPA: 1.15
Fitter: 3" I.D.



14409IB
H: 39 1/2"
W: 15"
Proj: 18"
T/O: 20 1/2"



14430BP
H: 40"
W: 15"
EPA: 2.28
Fitter: 3" I.D.