

GRANDE JEFFERSON

8432TL - 8453TL

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



8432TL

H: 30 3/4"

W: 14 3/4"

FITTER: 3" I.D.

Finish: Verde Bronze (VBZ)

Hanover®
LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **8432TL**


dimensions: **H: 26 7/8" W: 14 3/4"**

E.P.A.: **1.22**

max. weight: **44 lbs.**

Sitescape
SITE • ROADWAY • AREA LIGHTING

- Cast aluminum removable top cap.
- Twist-lock photo control and receptacle supplied (specify voltage desired).
- Horizontally mounted type III cut-off optical assembly with porcelain base 4kv socket mounted in roof. (lamp not supplied)
- Cast aluminum hinged square roof and cage.
- Prismatic polycarbonate panels shown.
- Panels secured to cage with clips and screws.
- 3/4 frosted glass chimney and burnished and lacquered brass chimney holder. (not electrified)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast housing
- Removable access door and slide-out ballast tray. (supplied with quick disconnects for easy removal)
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- Three 5/16-18 stainless steel allen head set screws secure fixture to post or tenon.
- ETL and cETL listed.

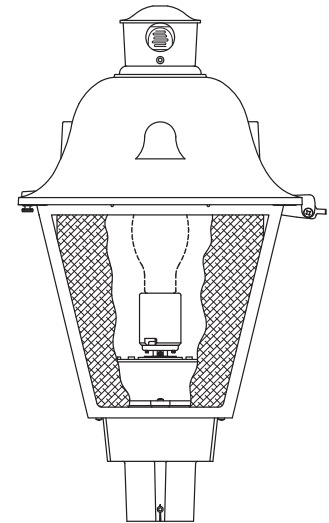

PRODUCT INFORMATION

Order Example:

HPS 8432TL BLK OP 150 120 83 10TL

- | | | | | | | | |
|--------------------|----------|----------|----------|---------------------------|----------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 Source | | | | 5 Wattage / Socket | | | |
| 2 Model No. | | | | 6 Voltage | | | |
| 3 Finish | | | | 7 Optics | | | |
| 4 Panels | | | | 8 Photoeye | | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W
Metal Halide (MH) - 70W, 100W, 150W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic CP - Clear Polycarbonate
OA - Opal Acrylic OP - Opal Polycarbonate
PP - Prismatic Polycarbonate

Voltage

120, 208, 240, 277

Optics

81 - 6" Refractor Type V83 - 8" Refractor Type V
82 - 6" Refractor Type III 84 - 8" Refractor Type II

Photoeye

10 - 120V only
11 - 208/277V (Must be installed in post only)



To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

PHOTOMETRIC DATA


Asymmetric Distribution

Fixture: 8432TL
Lamp: 150w H.P.S.
Lamp Lumens: 16,000

Optics: Type V
Mounting Height: 12'
Panels: Prismatic polycarbonate

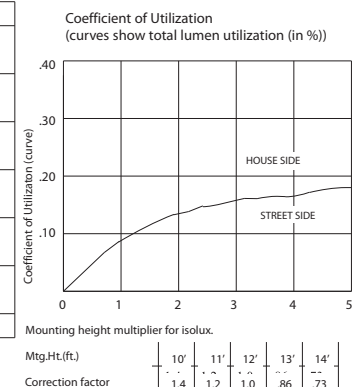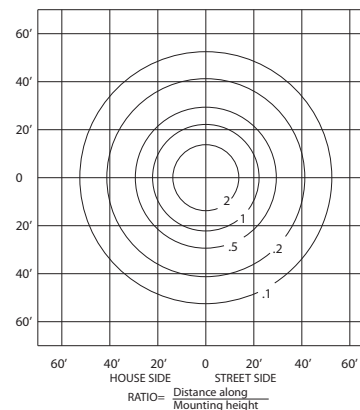

PRODUCT VISUAL INDEX



8432TL
H: 26 7/8"
W: 14 3/4"
EPA: 1.22
Fitter: 3" I.D.



8453TL
H: 26 7/8"
W: 14 3/4"
EPA: 1.22
Fitter: 3" I.D.