



B175FSM
Vintage
Copper

B173FSM
Verde
Copper

B17530
Black

B173FSM
Vintage
Copper

Ordering Guide

7 B175FSM VTC CTP MED

- 7 - Quantity
- B175FSM - Model Number
- VTC - Finish Code
- CTP - Panel/Globe Code
- MED - Wattage, Lamping or other options

All products are made to order, please consult factory for lead time.

Grosse Pointe

- B17300 – small**
- B17500 – medium**

Standard on all fixtures below:

- Porcelain medium base socket - (17300 - 9⁵/₈" dia., - 60w max. 17500 - 13" dia., 100w max.)
- Clear textured UV stabilized polycarbonate globe
- Painted spun aluminum top dome
- Cast aluminum construction
- All finishes available, see page 80

B17360	B17370	B17375	B173FSM	B17330	B17320	B17560	B17570	B17575	B175FSM	B17530	B17520
H: 22 ¹ / ₈ " W: 9 ⁵ / ₈ "	H: 26" W: 9 ⁵ / ₈ " EXT: 11 ¹ / ₄ " T/O: 21 ⁵ / ₈ "	H: 31 ¹ / ₈ " W: 9 ⁵ / ₈ " EXT: 11 ¹ / ₄ " T/O: 21 ⁵ / ₈ "	H: 22 ¹ / ₈ " W: 9 ⁵ / ₈ " EXT: 11 ¹ / ₂ " T/O: 16"	H: 22 ¹ / ₂ " W: 9 ⁵ / ₈ " Post NOT Included	H: 20 ³ / ₈ " W: 9 ⁵ / ₈ " H (O/A): 34 ³ / ₈ " CHAIN: 12"	H: 28" W: 10 ¹ / ₄ "	H: 32 ¹ / ₂ " W: 13" EXT: 14 ¹ / ₂ " T/O: 27 ¹ / ₂ "	H: 36 ³ / ₄ " W: 13" EXT: 14 ¹ / ₂ " T/O: 27 ¹ / ₂ "	H: 29 ¹ / ₂ " W: 13" EXT: 16 ³ / ₄ " T/O: 19 ³ / ₈ "	H: 27 ³ / ₄ " W: 13" Post NOT Included	H: 26 ³ / ₈ " W: 13" H (O/A): 41 ⁷ / ₈ " CHAIN: 24"

GROSSE POINTE

3170BP - 3171BP - 3172BP - 3173BP - 3174BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



3173BP

H: 36"

W: 17 1/2"

FITTER: 3" I.D.

Finish: Black (BLK)

Hanover®

LANTERN

Handcrafted in America


GROSSE POINTE

3176BP - 3177BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING

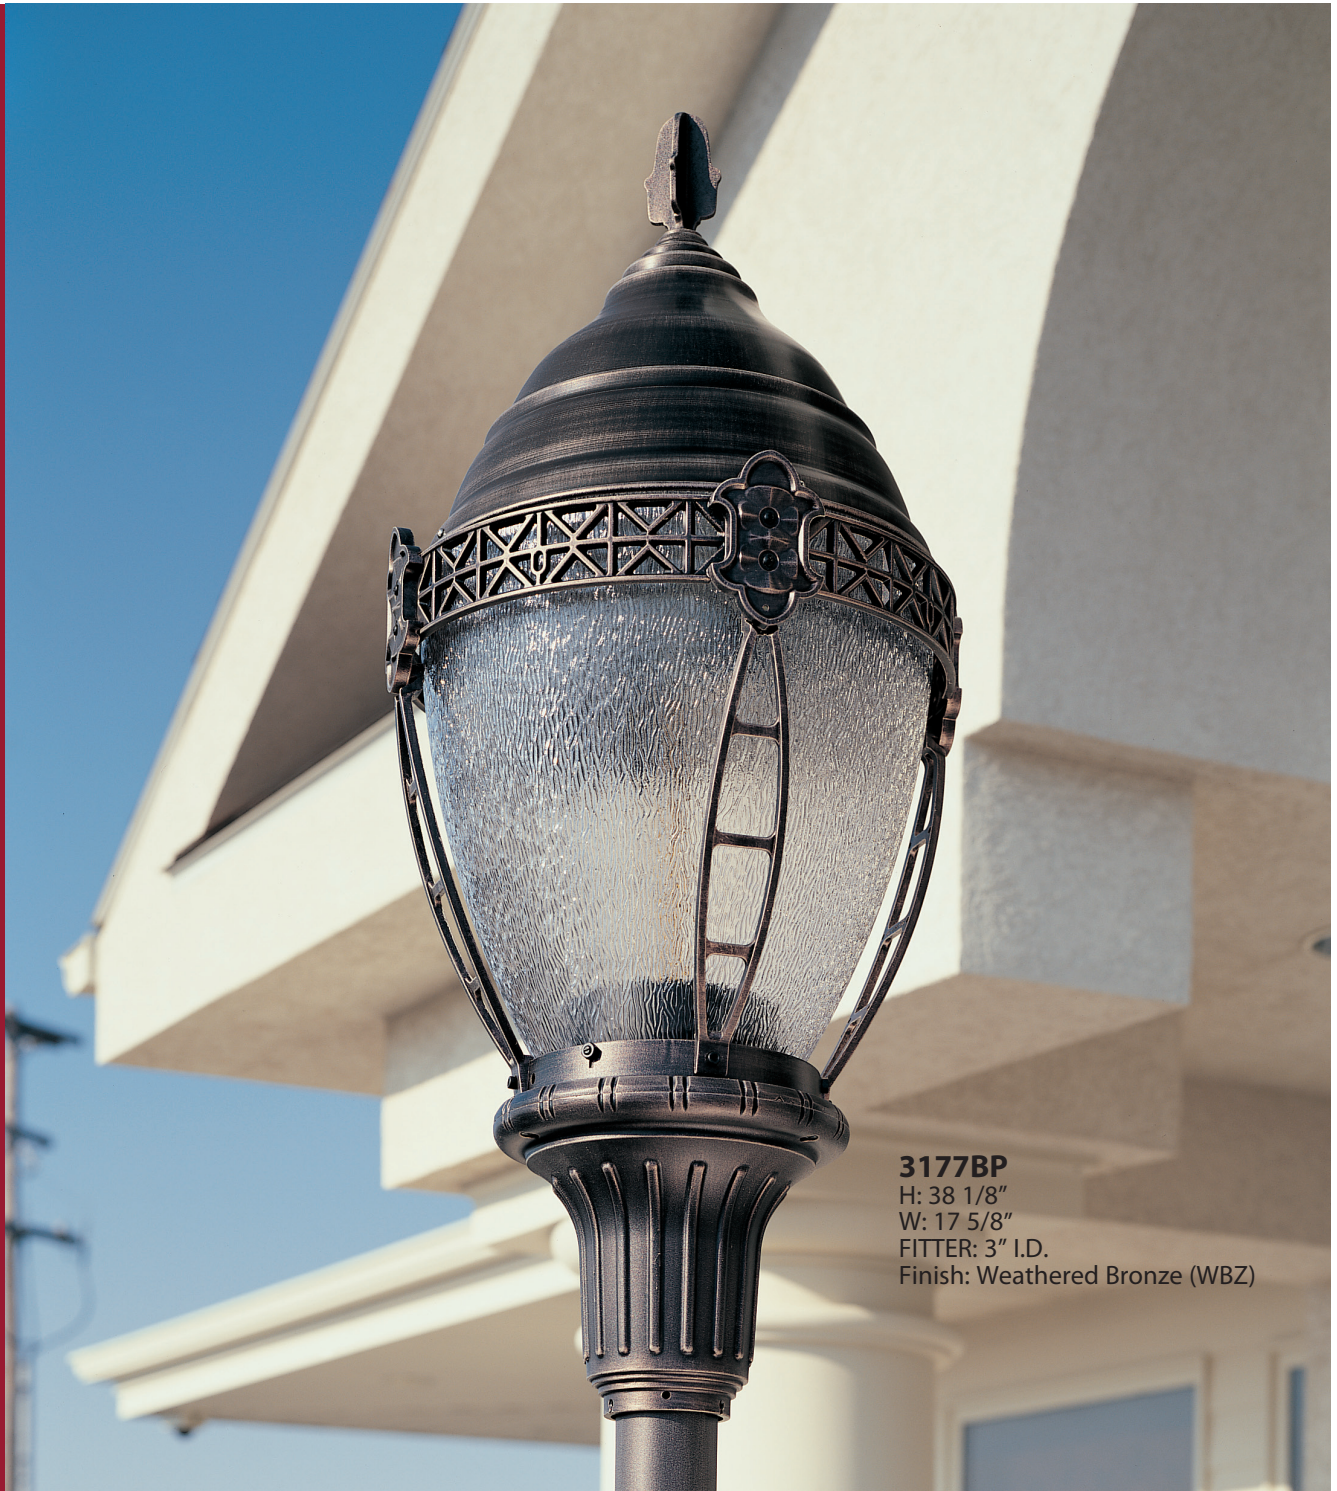

3177BP

H: 38 1/8"

W: 17 5/8"

FITTER: 3" I.D.

Finish: Weathered Bronze (WBZ)

Hanover®

LANTERN


Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **3177BP**
 dimensions: **H: 38 1/8" W: 17 1/8"**
 E.P.A.: **2.35**
 max. weight: **36 lbs.**

Sitescape
 SITE • ROADWAY • AREA LIGHTING

- Cast Aluminum finial.
- Spun aluminum top dome, secures to textured globe with four stainless steel self tapping screws.
- Type V cut-off reflector system concealed by top dome.
- Cast aluminum decorative band and legs secured with stainless steel screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Clear rippled textured polycarbonate globe, U.V. stabilized.
- Three 1/4-20 stainless steel set screws and hex nuts supplied for locking globe to ballast pod.
- Loosen all 3 set screws and hex nuts for relamping.
- Two piece cast aluminum water tight ballast compartment.
- Lower housing has 16 flutes.
- Three 5/16-18 stainless steel locking set screws supplied for securing lantern to 3" O.D. post or tenon.
- ETL and cETL listed. ISO 9001: 2008

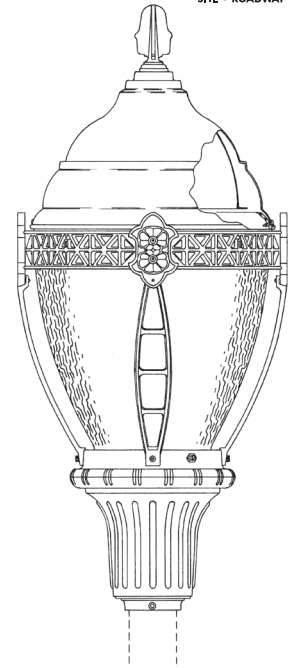

PRODUCT INFORMATION

Order Example:

HPS 3177BP WBZ 150 120 10



- 1** Source
- 2** Model No.
- 3** Finish
- 4** Wattage / Socket
- 5** Voltage
- 6** Photoeye

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
 High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
 Metal Halide (MH) - 70W, 100W, 150W, 250W
 LED - Consult Factory

Finish

All Finishes Available (see page 3)

Globe

Clear Texture Polycarbonate


Voltage

120V, 208V, 240V, 277V

Photoeye (optional)

10 - 120V only
 11 - 208/277V (Must be installed in post only)

PHOTOMETRIC DATA

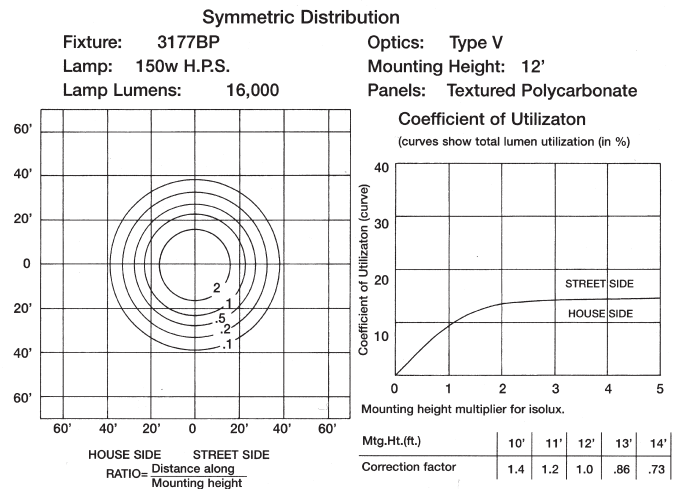

PRODUCT VISUAL INDEX



3176BP
 H: 38 1/8"
 W: 15 5/8"
 EPA: 2.30
 Fitter: 3" I.D.



3177BP
 H: 38 1/8"
 W: 17 1/8"
 EPA: 2.35
 Fitter: 3" I.D.

To ensure prompt and efficient processing of your order, Please follow the sequence listed in the example above.

GROSSE POINTE (MEDIUM)

32470BP - 32471BP - 32472BP

32473BP - 32474BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING




32473BP
H: 29 3/8"
W: 13"
FITTER: 3" I.D.
Finish: Verde Copper
(VCP)

Hanover®
LANTERN
Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **32473BP**
dimensions: **H: 29 3/8" W: 13"**
E.P.A.: **1.36**
max. weight: **21 lbs.**

- Cast aluminum finial painted to match finish of fixture.
- Spun aluminum dome.
- Cast aluminum decorative band and legs secured with stainless steel screws.
- Clear acrylic or clear polycarbonate, U.V. stabilized, type III or V refractor globe.
- Porcelain base 4kv socket. (lamp not supplied)
- Three 1/4-20 stainless steel set screws and hex nuts supplied for locking globe to ballast pod.
- To relamp loosen all three set screws and hex nuts.
- Two piece cast aluminum water tight ballast compartment.
- Three 5/16-18 stainless steel locking set screws supplied for securing lantern to post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed. ISO 9001: 2008

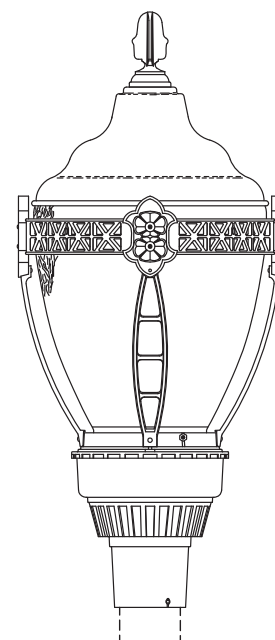

PRODUCT INFORMATION

Order Example:

HPS **32473BP** **BLK** **100** **120**

1 **2** **3** **4** **5**

- 1** Source
- 2** Model No.
- 3** Finish
- 4** Wattage / Socket
- 5** Voltage

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 100W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W*
Metal Halide (MH) - 50W, 70W
LED - Consult Factory

Globe

Clear Textured Polycarbonate


Finish

All Finishes Available (see page 3)


Voltage

120V, 208V, 240V, 277V
(*100W HPS - 120V only)

PHOTOMETRIC DATA

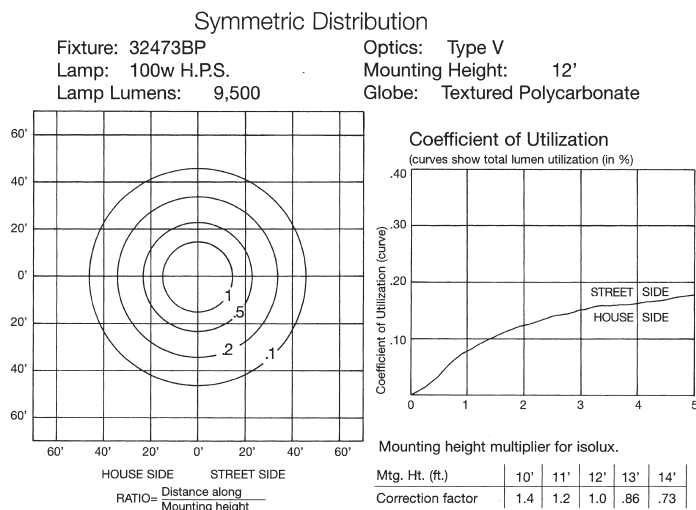

PRODUCT VISUAL INDEX

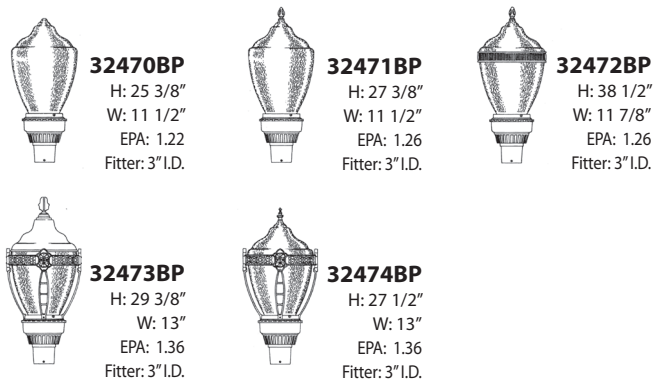

To ensure prompt and efficient processing of your order, Please follow the sequence listed in the example above.