

HYDE PARK

2170BP - 2172BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



2170BP

H: 30"

W: 14"

FITTER: 3" I.D.

Finish: Verde (VGN)

Hanover®

LANTERN


Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **2170BP**
dimensions: **H: 30" W: 14"**
E.P.A.: **1.60**
max. weight: **25 lbs.**

Sitescape
SITE • ROADWAY • AREA LIGHTING

- Cast aluminum finial. (select models)
- Clear ripple textured polycarbonate UV stabilized globe.
- Porcelain base 4kv socket. (lamp not supplied)
- Three 1/4-20 stainless steel set screws and hex nuts supplied for locking globe to ballast pod.
- 2 pc. cast aluminum water tight ballast compartment.
- Three 5/16-18 stainless steel set screws supplied for securing lantern to post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed. ISO 9001: 2008

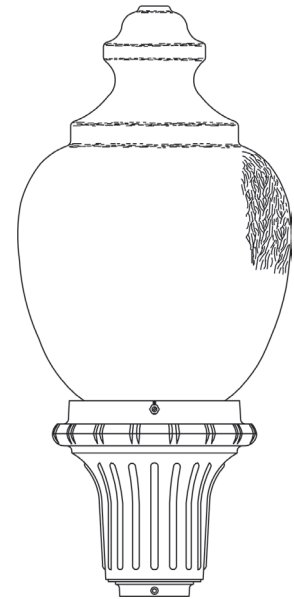

PRODUCT INFORMATION

Order Example:

HPS 2170BP BLK 100 120 81 10



- 1** Source
- 2** Model No.
- 3** Finish
- 4** Wattage / Socket
- 5** Voltage
- 6** Optics
- 7** Photoeye

Source / Wattage / Socket (Med. or Mog.)

- Incandescent (INC) - 200W max.
- High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W
- Metal Halide (MH) - 50W, 70W, 100W, 150W
- LED - Consult Factory

Finish

All Finishes Available (see page 3)

Globe

Clear Textured Polycarbonate

Voltage

120V, 208V, 240V, 277V

Optics (optional)

- 81 - 6" Refractor Type V
- 82 - 6" Refractor Type III

Photoeye (optional)


- 10 - 120V only
- 11 - 208/277V (Must be installed in post only)

To ensure prompt and efficient processing of your order, Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution

Fixture: **2170BP** Optics: Type V
Lamp: 150w H.P.S. Mounting Height: 12'
Lamp Lumens: 16,000 Globe: Textured polycarbonate

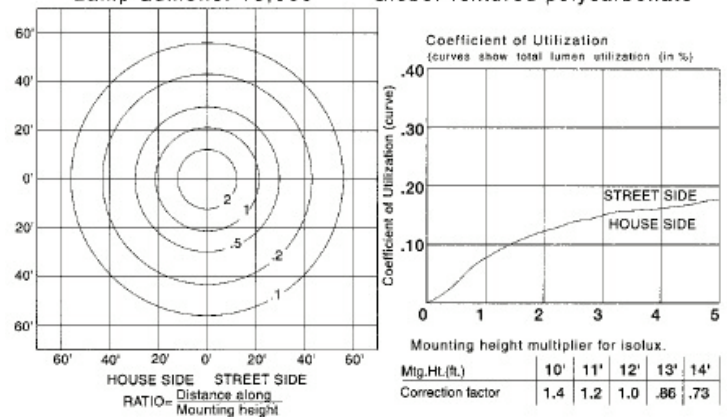

PRODUCT VISUAL INDEX



2170BP
H: 30"
W: 14"
EPA: 1.60
Fitter: 3" I.D.



2172BP
H: 34"
W: 14"
EPA: 1.62
Fitter: 3" I.D.