



B30860
Verde

B23FSM
Rustic Bronze

B9410
Black

B9310
Granite

Ordering Guide

2 B30860 VGN CA C4

- 2 - Quantity
- B30860 - Model Number
- VGN - Finish Code
- CA - Panel/Globe Code
- C4 - Wattage, Lamping or other options












All products are made to order, please consult factory for lead time.













Jamestown / Grande Jamestown











B2300 – small
B9300 – medium
B9400 – large
B30800 – grande









Standard on all fixtures below:

- Small Series > Porcelain medium base socket with painted socket cover - 60w max., Clear beveled glass panels
- Medium Series > 3-light candelabra sockets with painted candle cluster and socket covers - 25w max. per socket, Clear beveled glass panels
- Large Series > 4-light candelabra sockets with painted candle cluster and socket covers - 25w max. per socket (B9420, B9421, B94FRM 3-light), Clear beveled glass panels
 - Grande Series > 4-light candelabra sockets with painted candle cluster and socket covers - 25w max. per socket (B308FRM, B30820 3-light), Clear acrylic panels
 - Higher wattages may be used ONLY with glass
 - Cast aluminum construction, painted finials and spindles
 - All finishes available, see page 80

										
B2310 H: 19 5/8" W: 7 5/8" EXT: 9 3/4" T/O: 15 3/8"	B2370 H: 19 5/8" W: 7 5/8" EXT: 9 3/4" T/O: 15 3/8"	B2315 H: 21 7/8" W: 7 5/8" EXT: 9 3/4" T/O: 15 3/8"	B2375 H: 21 7/8" W: 7 5/8" EXT: 9 3/4" T/O: 15 3/8"	B2310RM H: 17 1/8" W: 7 5/8" EXT: 9 5/8" T/O: 4 1/4"	B2372 H: 17 1/8" W: 7 5/8" EXT: 9 5/8" T/O: 4 1/4"	B23FSM H: 16" W: 7 5/8" EXT: 10" T/O: 9 3/4"	B23FRM H: 12 5/8" W: 7 5/8" EXT: 10" T/O: 6 1/4"	B2320 H: 15 5/8" W: 7 5/8" H(O/A): 29 1/4" CHAIN: 12"	B2321 H: 16 3/4" W: 7 5/8"	B2330 H: 16 3/8" W: 7 5/8" Post NOT Included

											
B9310 H: 26 3/8" W: 11 1/8" EXT: 12 7/8" T/O: 21 1/4"	B9370 H: 26 3/8" W: 11 1/8" EXT: 12 7/8" T/O: 21 1/4"	B9315 H: 27 1/2" W: 11 1/8" EXT: 12 7/8" T/O: 21 1/4"	B9375 H: 27 1/2" W: 11 1/8" EXT: 12 7/8" T/O: 21 1/4"	B9310RM H: 23 7/8" W: 11 1/8" EXT: 12 7/8" T/O: 5 7/8"	B9372 H: 23 7/8" W: 11 1/8" EXT: 12 7/8" T/O: 5 7/8"	B93FSM H: 24 7/8" W: 11 1/8" EXT: 14 7/8" T/O: 14 7/8"	B93FRM H: 18 7/8" W: 11 1/8" EXT: 14 7/8" T/O: 10"	B9320 H: 20 5/8" W: 11 1/8" H(O/A): 47 1/4" CHAIN: 24"	B9321 H: 21 3/4" W: 11 1/8"	B9330 H: 21 5/8" W: 11 1/8" Post NOT Included	B9350 H: 26 3/8" W: 31 5/8" EXT: 12 7/8" T/O: 21 1/4"

									
B9410 H: 35 3/4" W: 13 5/8" EXT: 14" T/O: 30 5/8"	B9470 H: 35 3/4" W: 13 5/8" EXT: 14" T/O: 30 5/8"	B9415 H: 40 3/8" W: 13 5/8" EXT: 14" T/O: 30 5/8"	B9475 H: 40 3/8" W: 13 5/8" EXT: 14" T/O: 30 5/8"	B94FSM H: 33 1/4" W: 13 3/4" EXT: 16" T/O: 23 1/4"	B94FRM H: 26" W: 13 3/4" EXT: 16" T/O: 10"	B9420 H: 30 3/4" W: 13 5/8" H(O/A): 57 7/8" CHAIN: 24"	B9421 H: 36" W: 13 5/8"	B9430 H: 30 7/8" W: 13 5/8" Post NOT Included	B9450 H: 35 3/4" W: 70 7/8" EXT: 14" T/O: 30 5/8"

							
B30817 H: 48 1/2" W: 20 3/4" EXT: 23 1/8" T/O: 37 1/4"	B30818 H: 57 3/8" W: 20 3/4" EXT: 23 1/8" T/O: 37 1/4"	B308FSM H: 45 1/8" W: 20 3/4" EXT: 21 5/8" T/O: 32 5/8"	B308FRM H: 45 1/8" W: 20 3/4" EXT: 21 5/8" T/O: 12 1/2"	B30820 H: 42 1/4" W: 20 3/4" H(O/A): 81 3/8" CHAIN: 36"	B30830 H: 42 13/16" W: 20 3/4" Post NOT Included	B30860 H: 49 7/8" W: 20 3/4" Pier Base INCLUDED	B30850 H: 35 3/4" W: 70 7/8" EXT: 14" T/O: 30 5/8"

GRANDE JAMESTOWN

30810WA - 30820CC - 30834BP - 30834R3

30834R5 - 30835BP - 30835R3 - 30835R5

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



30834BP

H: 42 3/4"

W: 20 3/4"

FITTER: 3" I.D.

Finish: Rustic Bronze (RBZ)

Hanover®


LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **30834BP**
dimensions: **H: 42 3/4" W: 20 3/4"**
E.P.A.: **2.60**
max. weight: **54 lbs.**

- Cast aluminum finial, cap and neck.
- Cast aluminum hex roof secures to cage with two 1/4-20 stainless steel screws.
- Top cone reflector hidden inside roof.
- Cast aluminum hex cage with removable door for easy relamping
- Clear acrylic panels shown. Panels secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast compartment.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- Three 5/16-18 stainless steel allen head set screws secure fixture to 3" O.D. post or tenon.
- ETL and cETL listed.

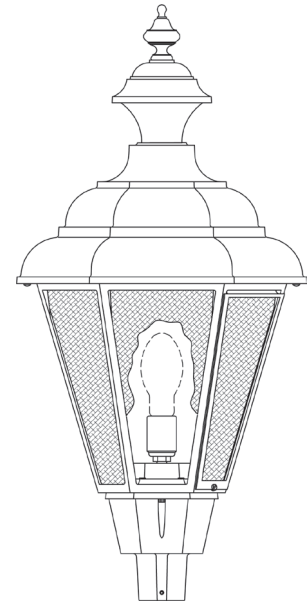

PRODUCT INFORMATION

Order Example:

HPS 30834BP BLK CP 150 120 82 10



- | | |
|--------------------|---------------------------|
| 1 Source | 5 Wattage / Socket |
| 2 Model No. | 6 Voltage |
| 3 Finish | 7 Optics |
| 4 Panels | 8 Photoeye |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic
OA - Opal Acrylic
PP - Prismatic Polycarbonate
CP - Clear Polycarbonate
OP - Opal Polcarbonate

Voltage

120, 208, 240, 277

Optics (optional)

81 - 6" Refractor Type V83 - 8" Refractor Type V
82 - 6" Refractor Type III 84 - 8" Refractor Type II

Photoeye (optional)

10 - 120V only
11 - 208/277V (Must be installed in post only)



To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution

Fixture: 30834BP
Lamp: 150w H.P.S.
Lamp Lumens: 16,000


Optics: Type V
Mounting Height: 12'
Panels: Prismatic polycarbonate

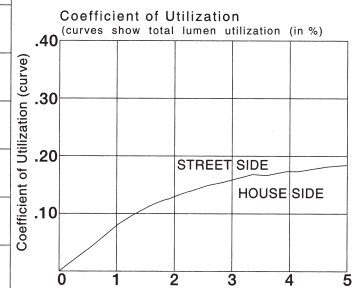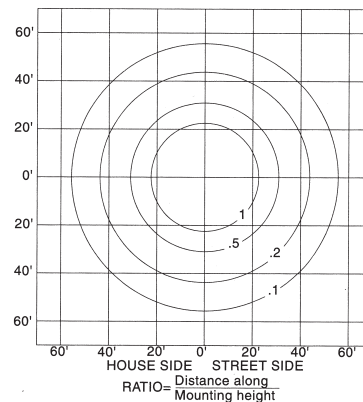

Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73

PRODUCT VISUAL INDEX

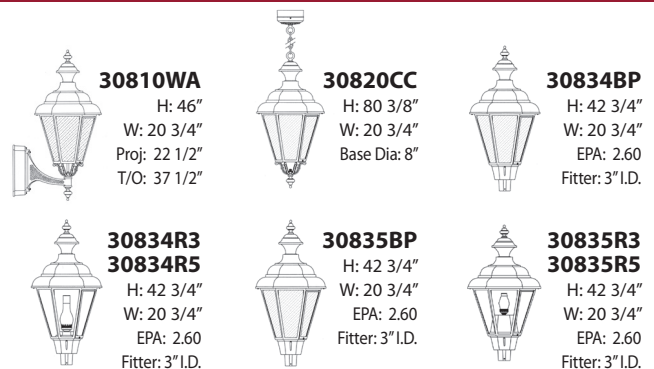

MANOR HOUSE 4110WA - 5510WA - 5534BP
WESTMINISTER 6010WA - 6034BP
JAMESTOWN 9410WA - 9434BP
Post Top

Sitescape[®]
SITE • ROADWAY • AREA LIGHTING



5534BP
H: 31 3/4"
W: 14"
FITTER: 3" I.D.
Finish: Antique Copper (ACP)


Hanover[®]
LANTERN
Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **5534BP**
dimensions: **H: 31 1/4" W: 14"**
E.P.A.: **1.30**
max. weight: **26 lbs.**

Sitescape
SITE • ROADWAY • AREA LIGHTING

- Cast aluminum finial.
- Cast aluminum roof cap.
- Cast aluminum roof.
- Roof secures to cage with two brass thumbscrews. To relamp remove thumbscrews.
- Cast aluminum cage.
- Six prismatic polycarbonate panels shown.
- Panels are secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast compartment.
- Three stainless steel 5/16-18 set screws secure lantern to post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

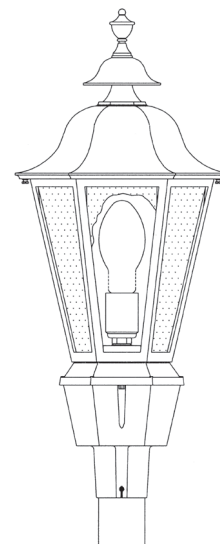

PRODUCT INFORMATION

Order Example:

HPS 5534BP BLK CP 100 120 81 10



- | | |
|--------------------|---------------------------|
| 1 Source | 5 Wattage / Socket |
| 2 Model No. | 6 Voltage |
| 3 Finish | 7 Optics |
| 4 Panels | 8 Photoeye |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W
Metal Halide (MH) - 50W, 70W, 100W, 150W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic
OA - Opal Acrylic
PP - Prismatic Polycarbonate
CP - Clear Polycarbonate
OP - Opal Polycarbonate

Voltage

120, 208, 240, 277

Optics (optional)

81 - 6" Refractor Type V
82 - 6" Refractor Type III

Photoeye (optional)



10 - 120V only
11 - 208/277V (Must be installed in post only)

To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution


Fixture: 5534BP
Lamp: 150w H.P.S.
Lamp Lumens: 16,000
Optics: Type V
Mounting Height: 12'
Panels: Prismatic polycarbonate

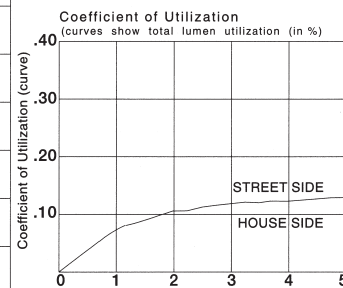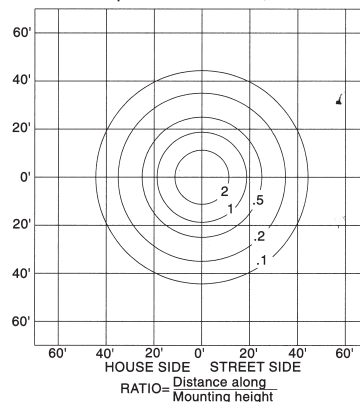

Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73

PRODUCT VISUAL INDEX

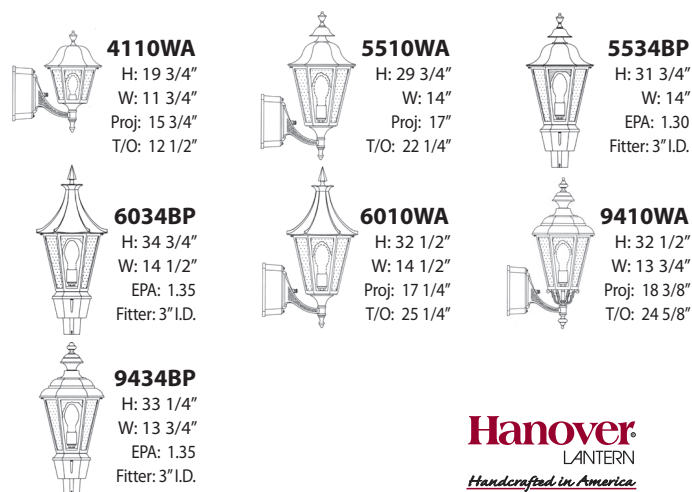

Hanover
LANTERN
Handcrafted in America

JAMESTOWN 9932WA - 9935BP
PLYMOUTH 9962WA - 99634BP
Post Top 9952WA - 99432BP
9972WA

Sitescape[®]
SITE • ROADWAY • AREA LIGHTING




9935BP
H: 24"
W: 11 1/4"
FITTER: 3" I.D.
Finish: Black (BLK)

Hanover[®]
LANTERN
Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **99634BP**
 dimensions: **H: 33 3/4" W: 13 3/4"**
 E.P.A.: **1.35**
 max. weight: **25 lbs.**

- Cast aluminum finial.
- Cast aluminum neck and cap.
- Cast aluminum roof.
- Roof secures to cage with two brass thumbscrews.
- To relamp loosen thumbscrews.
- Cast aluminum cage.
- Prismatic polycarbonate cage panels shown.
- Panels secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast compartment.
- Three 5/16-18 stainless steel allen head set screws secure fixture to 3" O.D. post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

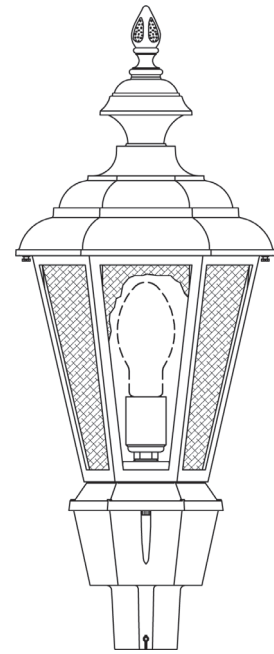

PRODUCT INFORMATION

Order Example:

HPS 99634BP BLK CP 100 120 81 10

1 Source	5 Wattage / Socket
2 Model No.	6 Voltage
3 Finish	7 Optics
4 Panels	8 Photoeye

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
 High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W
 Metal Halide (MH) - 50W, 70W, 100W, 150W
 LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic CP - Clear Polycarbonate
 OA - Opal Acrylic OP - Opal Polcarbonate
 PP - Prismatic Polycarbonate

Voltage

120, 208, 240, 277

Optics (optional - 99634BP, 9962WA only)

81 - 6" Refractor Type V
 82 - 6" Refractor Type III

Photoeye (optional)



10 - 120V only
 11 - 208/277V (Must be installed in post only)

To ensure prompt and efficient processing of your order,
 Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution



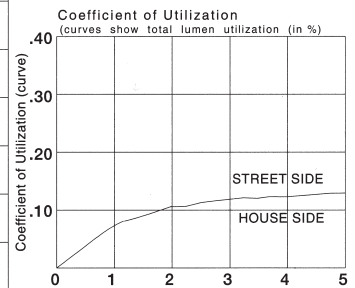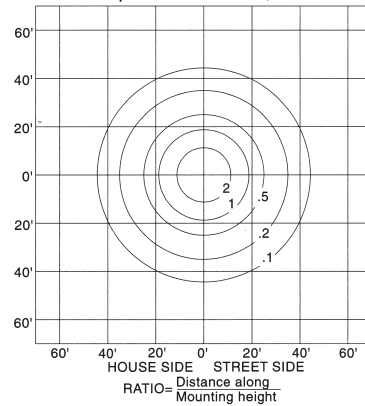




Fixture: 99634BP Optics: Type V
 Lamp: 150w H.P.S. Mounting Height: 12'
 Lamp Lumens: 16,000 Panels: Prismatic polycarbonate



Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73

PRODUCT VISUAL INDEX

 9932WA H: 22 1/4" W: 11 1/4" Proj: 16" T/O: 15 3/4"	 9962WA H: 32 7/8" W: 13 3/4" Proj: 18 3/8" T/O: 24 1/4"	 9935BP H: 24" W: 11 1/4" Fitter: 3" I.D.
 99634BP H: 33 3/4" W: 13 3/4" EPA: 1.35 Fitter: 3" I.D.	 9952WA H: 24 1/2" W: 9 1/2" Proj: 15 1/2" T/O: 15 3/4"	 9972WA H: 28 1/4" W: 11 1/4" Proj: 17 1/8" T/O: 19 1/4"
 99432BP H: 28 1/4" W: 11 1/4" EPA: 1.02 Fitter: 3" I.D.		