


OXFORD

2710WA - 2732BP - 2738BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING

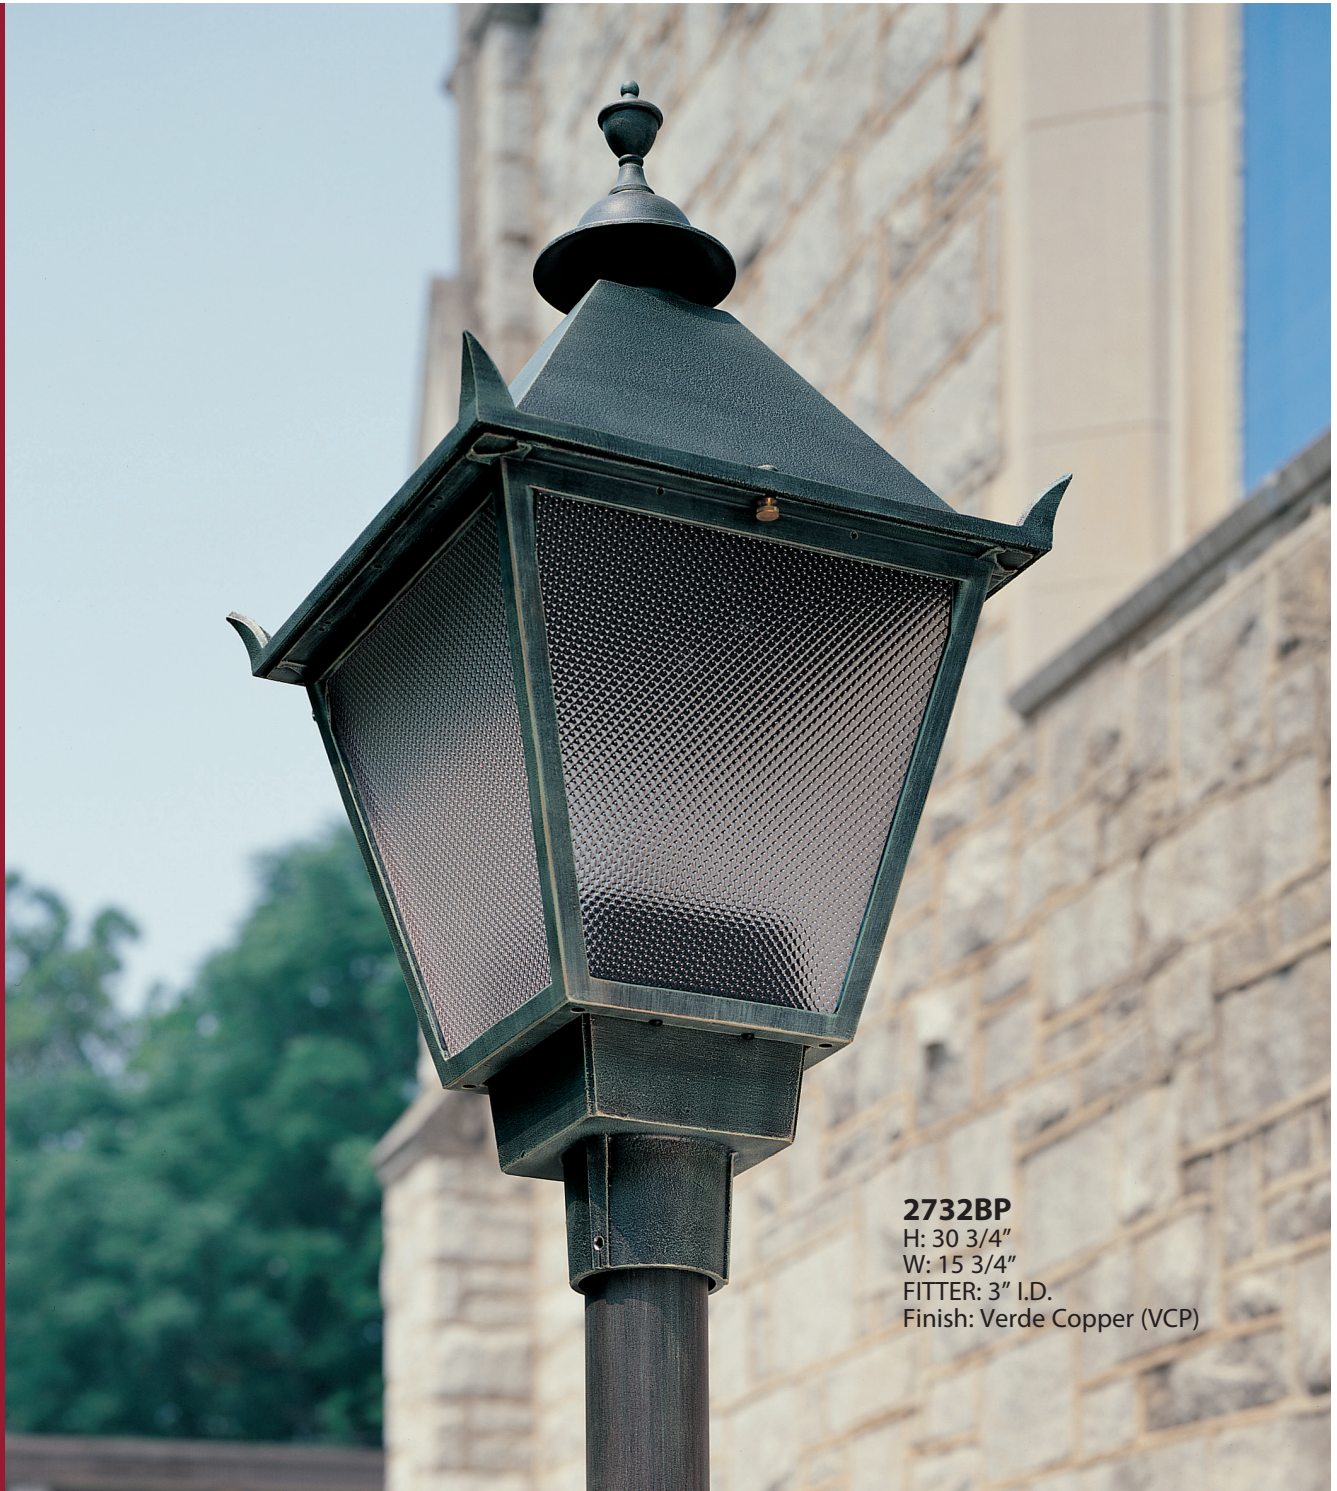

2732BP

H: 30 3/4"

W: 15 3/4"

FITTER: 3" I.D.

Finish: Verde Copper (VCP)

Hanover®

LANTERN


Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **2732BP**
 dimensions: **H: 30 3/4" W: 15 3/4"**
 E.P.A.: **1.22**
 max. weight: **42 lbs.**

Sitescape
 SITE • ROADWAY • AREA LIGHTING

- Cast aluminum finial.
- Cast aluminum cap.
- Cast aluminum hinged roof for easy relamping.
- Cast aluminum hinged cage.
- Prismatic polycarbonate panels shown.
- Panels secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast housing.
- Removable access door and slide-out ballast tray. (supplied with quick disconnects for easy removal, 2738BP series only)
- Three 5/16-18 stainless steel set screws supplied for locking lantern to 3" dia. post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

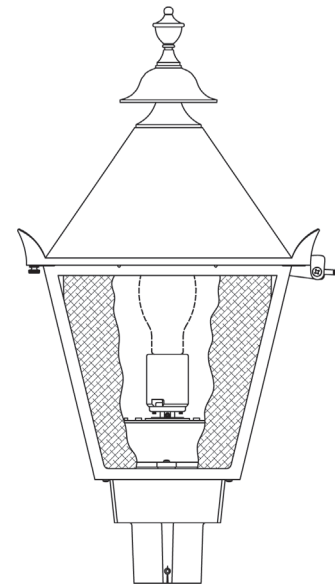

PRODUCT INFORMATION

Order Example:

HPS 2732BP VCP CP 100 120 83 10



- 1** Source
- 2** Model No.
- 3** Finish
- 4** Panels
- 5** Wattage / Socket
- 6** Voltage
- 7** Optics
- 8** Photoeye

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
 High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
 Metal Halide (MH) - 70W, 100W, 150W, 250W
 LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic
 OA - Opal Acrylic
 PP - Prismatic Polycarbonate
 CP - Clear Polycarbonate
 OP - Opal Polcarbonate

Voltage

120, 208, 240, 277

Optics

81 - 6" Refractor Type V83 - 8" Refractor Type V
 82 - 6" Refractor Type III 84 - 8" Refractor Type II

Photoeye

10 - 120V only
 11 - 208/277V (Must be installed in post only)



To ensure prompt and efficient processing of your order,
 Please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution

Fixture: 2732BP
 Lamp: 150w H.P.S.
 Lamp Lumens: 16,000

Optics: Type V
 Mounting Height: 12'
 Panels: Prismatic polycarbonate

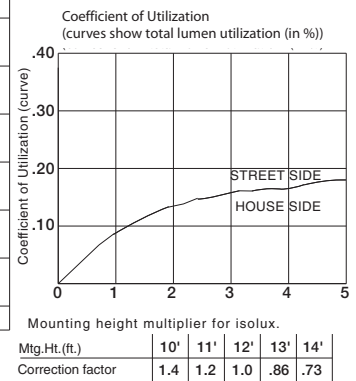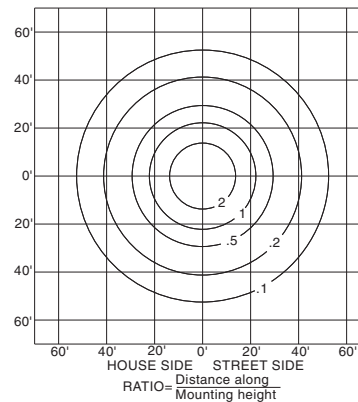


PRODUCT VISUAL INDEX



2732BP
 H: 30 3/4"
 W: 15 3/4"
 EPA: 1.22
 Fitter: 3" I.D.



2738BP
 H: 36"
 W: 15 3/4"
 EPA: 1.22
 Fitter: 3" I.D.



2710WA
 H: 33 3/4"
 W: 15 3/4"
 Proj: 24 3/4"
 T/O: 25 3/4"