

REGENCY 10500

10502R3 - 10502R5

Bracket Arms

263 - 263DB - 269 - 269DB

Sitescape®

SITE • ROADWAY • AREA LIGHTING



10502R3





H: 22 1/8"

W: 22"


Finish: Dark Bronze (DBZ)
shown on bracket arm 263

Hanover®
LANTERN
Handcrafted in America


VISUAL INDEX & DIMENSIONS

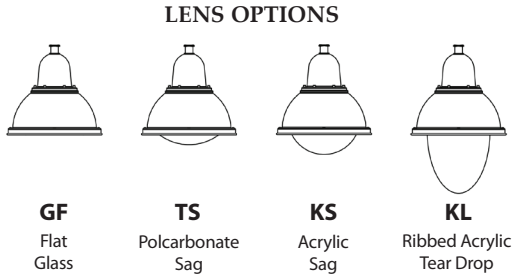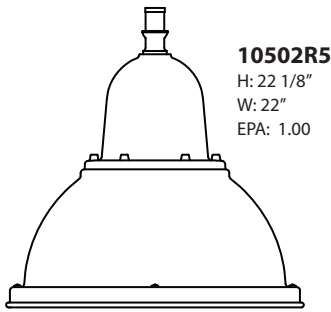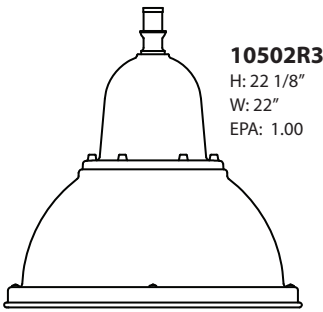


263 Single Bent Bracket Arm
H: 33 7/8"
W: 55"
EPA: 1.30

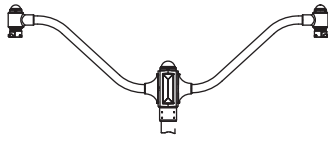

263DB Double Bracket Arm
H: 33 7/8"
W: 93 1/8"R
EPA: 2.00



269 Single Straight Bracket Arm
H: 19 1/8"
W: 55"
EPA: 1.20



269DB Double Straight Bracket
H: 19 1/8"
W: 93 1/8"R
EPA: 1.80

FEATURES

Source / Wattage / Socket (Med. or Mog.)
Incandescent (INC) - 200W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish
All Finishes Available (see page 3)

Lens
GF - Clear, Flat Tempered Glass KS - Acrylic Sag
KL - Ribbed Acrylic Tear Drop TS - Polycarbonate Sag

Voltage
120V, 208V, 240V, 277V

Optics
R3 Model - Type III
R5 Model - Type V

Bracket Arm
263
263DB
269
269DB

ORDERING EXAMPLE



- | | |
|--------------------|---------------------------|
| 1 Source | 5 Wattage / Socket |
| 2 Model No. | 6 Voltage |
| 3 Finish | 7 Bracket Arm |
| 4 Lens | |

REGENCY 10200

10202R3 - 10202R5

Bracket Arms

263 - 263DB - 269 - 269DB

Sitescape®

SITE • ROADWAY • AREA LIGHTING



10202R3

H: 22 1/8"


W: 22"

Finish: Verde Copper (VCP)
shown on bracket arm 263


Hanover®
LANTERN

Handcrafted in America


VISUAL INDEX & DIMENSIONS

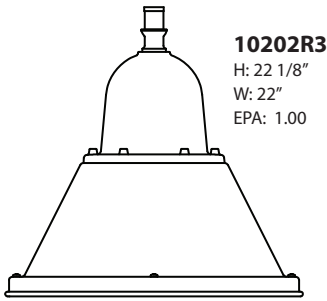

10202R3
H: 22 1/8"
W: 22"
EPA: 1.00

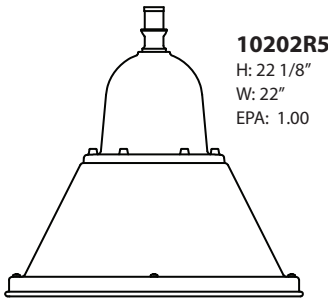

10202R5
H: 22 1/8"
W: 22"
EPA: 1.00

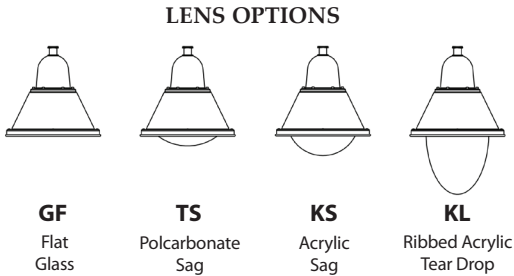


LENS OPTIONS

GF
Flat
Glass


TS
Polycarbonate
Sag

KS
Acrylic
Sag


KL
Ribbed Acrylic
Tear Drop




**263 Single Bent
Bracket Arm**
H: 33 7/8"
W: 55"
EPA: 1.30

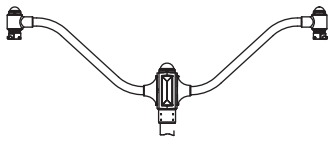

**263DB Double
Bracket Arm**
H: 33 7/8"
W: 93 1/8"R
EPA: 2.00



**269 Single Straight
Bracket Arm**
H: 19 1/8"
W: 55"
EPA: 1.20



**269DB Double
Straight Bracket**
H: 19 1/8"
W: 93 1/8"R
EPA: 1.80

FEATURES

Source / Wattage / Socket (Med. or Mog.)
Incandescent (INC) - 200W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish
All Finishes Available (see page 3)

Lens
GF - Clear, Flat Tempered Glass
KL - Ribbed Acrylic Tear Drop
KS - Acrylic Sag
TS - Polycarbonate Sag

Voltage
120V, 208V, 240V, 277V

Optics
R3 Model - Type III
R5 Model - Type V

Bracket Arm
263
263DB
269
269DB

ORDERING EXAMPLE



- | | | | |
|---|-----------|---|------------------|
| 1 | Source | 5 | Wattage / Socket |
| 2 | Model No. | 6 | Voltage |
| 3 | Finish | 7 | Bracket Arm |
| 4 | Lens | | |