

SEATTLE

2809IB - 2830BP - 2909IB - 2930BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



2930BP

H: 34"

W: 15"

FITTER: 3" I.D.

Finish: Black (BLK)

Hanover®


LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **2930BP**
dimensions: **H: 34" W: 15"**
E.P.A.: **3.03**
max. weight: **45 lbs.**

- Cast aluminum roof.
- Extruded aluminum vertical cage legs.
- Eight opal acrylic cage panels shown.
- Cage panels held in place by slots in vertical cage legs.
- Roof secures to top cage frame with two thumbscrews.
- To relamp loosen thumbscrews.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts housed in bottom cast aluminum cage moisture proof compartment.
- Six 5/16-18 stainless steel allen head set screws secure fixture to 3" O.D. post or tenon.
- Aluminum pipe fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

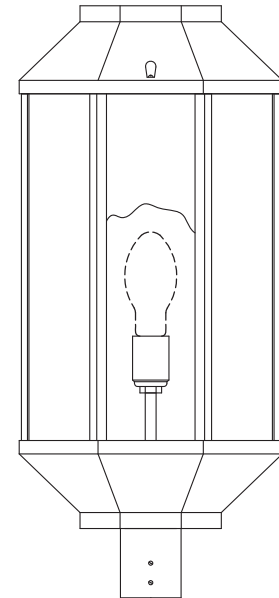

PRODUCT INFORMATION

Order Example:

HPS 2930BP BLK CP 100 120 83 10

- | | | | | | | | |
|----------|-----------|----------|----------|----------|------------------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 | Source | | | 5 | Wattage / Socket | | |
| 2 | Model No. | | | 6 | Voltage | | |
| 3 | Finish | | | 7 | Optics | | |
| 4 | Panels | | | 8 | Photoeye | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 50W, 70W, 100W, 150W, 250W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic
OA - Opal Acrylic
PP - Prismatic Polycarbonate
CP - Clear Polycarbonate
OP - Opal Polycarbonate

Voltage

120, 208, 240, 277

Optics (optional)

78 - 6" Refractor Type V89 - 8" Refractor Type II
79 - 6" Refractor Type III 96 - 6" Refractor Type III*
88 - 8" Refractor Type V97 - 6" Refractor Type V*

Photoeye (optional)



10 - 120V only
11 - 208/277V (Must be installed in post only)

*For 2800 series only

To ensure prompt and efficient processing of your order, please follow the sequence listed in the example above.

PHOTOMETRIC DATA

Symmetric Distribution
Fixture: 2930BP
Lamp: 150w H.P.S.
Lamp Lumens: 16,000
Optics: Type V
Mounting Height: 12'
Panels: Opal acrylic

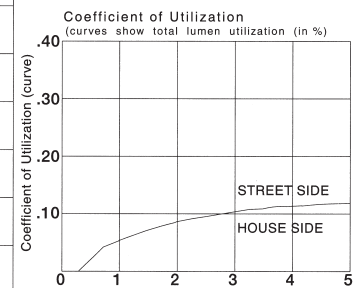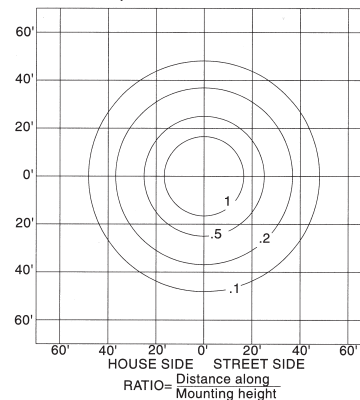


Mounting height multiplier for isolux.

Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73


PRODUCT VISUAL INDEX




2809IB
H: 20"
W: 10"
Proj: 13 1/4"
T/O: 10"



2830BP
H: 23"
W: 10"
EPA: 1.45
Fitter: 3" I.D.



2909IB
H: 30 1/8"
W: 15"
Proj: 15 7/8"
T/O: 15 1/8"



2930BP
H: 34"
W: 15"
EPA: 3.03
Fitter: 3" I.D.