



Ordering Guide

4 B532FRM GRA CA C3

4 - Quantity
 B532FRM - Model Number
 GRA - Finish Code
 CA - Panel/Globe Code
 C3 - Wattage, Lamping or other options

All products are made to order, please consult factory for lead time.

Stockholm

B53200 / B53300 – small

Standard on all fixtures below:

- 3-light painted candelabra candle cluster and candle covers - 25w max. per socket
- Cast aluminum construction with painted spun aluminum dome
- All finishes available, see page 80
- Molded acrylic lens



B532FSM

H: 26" W: 10 3/4"
 EXT: 15 3/8" T/O: 16"

B533FSM w/Crown

H: 26" W: 11 1/4"
 EXT: 15 3/8" T/O: 16"



B532FRM

H: 26 7/8" W: 10 3/4"
 EXT: 15 3/8" T/O: 10"

B533FRM w/Crown

H: 26 7/8" W: 11 1/4"
 EXT: 15 3/8" T/O: 10"



B53221

H: 24 3/4" W: 10 3/4"

B53321 w/Crown

H: 24 3/4" W: 11 1/4"



B53220

H: 23 3/8" W: 10 3/4"
 H (O/A): 37 1/4" CHAIN: 12"

B53320 w/Crown

H: 23 3/8" W: 11 1/4"
 H (O/A): 37 1/4" CHAIN: 12"



B53260

H: 24" W: 10 3/4"

B53360 w/Crown

H: 24" W: 11 1/4"



B53230

H: 24 1/2" W: 10 3/4"
 Post NOT Included

B53330 w/Crown

H: 24 1/2" W: 11 1/4"
 Post NOT Included

B53430
Forest Green



B53730
Verde Bronze



B536FSM
Weathered
Bronze



B535FSM
Shadow Rust



Stockholm

B53400 / B53500 – medium
B53600 / B53700 – large

Standard on all fixtures below:

- Medium series > 4-light painted candelabra candle cluster and candle cover - 25w max. per socket
- Large series > 4-light painted candelabra candle cluster and candle cover - 25w max. per socket
- Cast aluminum construction with painted spun aluminum dome
- All finishes available, see page 80
- Molded acrylic lens

B534FSM H: 31 3/8" W: 14 1/4" EXT: 17 1/8" T/O: 21 3/8"	B53420 H: 28 3/4" W: 14 1/4" H (O/A): 42 5/8" CHAIN: 12"	B53460 H: 29 3/8" W: 14 1/4"	B53430 H: 29 7/8" W: 14 1/4" Post NOT Included	B536FSM H: 39 1/4" W: 17 3/4" EXT: 21 1/2" T/O: 26 3/4"	B53620 H: 36 3/8" W: 17 3/4" H (O/A): 52 1/8" CHAIN: 12"	B53660 H: 36 3/4" W: 17 3/4"	B53630 H: 37" W: 17 3/4" Post NOT Included
B535FSM w/Crown H: 31 3/8" W: 15 1/2" EXT: 17 3/4" T/O: 21 3/8"	B53520 w/Crown H: 28 3/4" W: 15 1/2" H (O/A): 42 5/8" CHAIN: 12"	B53560 w/Crown H: 29 3/8" W: 15 1/2"	B53530 w/Crown H: 29 7/8" W: 15 1/2" Post NOT Included	B537FSM w/Crown H: 39 1/4" W: 19 3/8" EXT: 22 1/4" T/O: 26 3/4"	B53720 w/Crown H: 36 3/8" W: 19 3/8" H (O/A): 52 1/8" CHAIN: 12"	B53760 w/Crown H: 36 3/4" W: 19 3/8"	B53730 w/Crown H: 37" W: 19 3/8" Post NOT Included

STOCKHOLM

53630BP - 53630R5 - 536SBP

53730BP - 53730R5 - 537SBP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



53730BP

H: 36 3/4"

W: 17 3/4"

FITTER: 3" I.D.

Finish: Weathered
Bronze (WBZ)



53630R5

H: 36 3/4"

W: 17 3/4"

FITTER: 3" I.D.

Finish: Dark Bronze
(DBZ)

Hanover®
LANTERN


Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **53730BP**
dimensions: **H: 31" W: 20 1/2"**
E.P.A.: **2.17**
max. weight: **44 lbs.**

Sitescape
SITE • ROADWAY • AREA LIGHTING

- Cast aluminum finial painted to match finish of fixture.
- Spun aluminum cap.
- Roof mounted Type V cut-off reflector.
- Spun aluminum roof secures to top ring with two brass thumbscrews. To relamp loosen thumbscrews.
- Four cast aluminum crowns secure to roof with 8-32 stainless steel screws.
- Fluted cast aluminum top ring.
- Porcelain base 4kv socket. (lamp not supplied)
- Painted aluminum sleeve.
- Clear acrylic globe.
- Four cast aluminum cage legs secure to top and bottom rings with 8-32 stainless steel screws.
- Ballast and component parts mounted inside two piece cast aluminum moisture proof ballast compartment.
- Three 5/16-18 stainless steel set screws secures lantern to 3" O.D. post or tenon.
- Cast aluminum post fitter slips over 3" post or tenon.
- ETL and cETL listed.

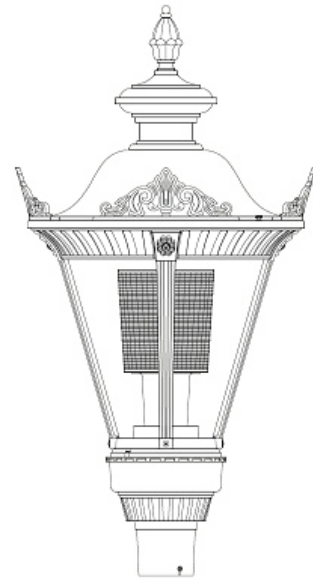

PRODUCT INFORMATION

Order Example:

HPS 53730BP VCP 100 120 - -



- 1** Source
- 2** Model No.
- 3** Finish
- 4** Wattage / Socket
- 5** Voltage
- 6** Optics
- 7** Photoeye

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 150W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W
Metal Halide (MH) - 50W, 70W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic Globe

Voltage

120, 208, 240, 277
(100W HPS - 120V only)

Optics (optional)

81 - 6" Refractor Type V

Photoeye (optional - both must be installed in post)


10 - 120V only
11 - 208/277V

PHOTOMETRIC DATA

Symmetric Distribution


Fixture: 53730BP
Lamp: 100w H.P.S.
Lamp Lumens: 9,500

Optics: Type V
Mounting Height: 10'
Panels: Clear DR acrylic

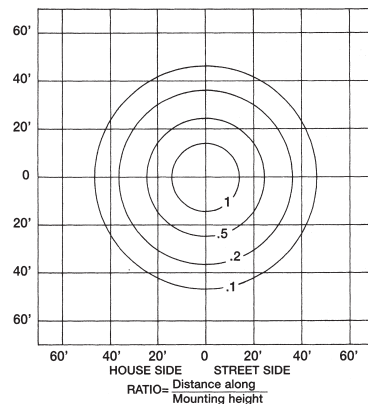

Coefficient of Utilization






(curves show total lumen utilization (in %))



Mounting height multiplier for isolux.

Mtg. Ht. (ft.)	8'	9'	10'	11'	12'
Correction factor	1.6	1.2	1.0	.82	.69

PRODUCT VISUAL INDEX



To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

Hanover
LANTERN
Handcrafted in America