

RICHMOND

9810WA - 9811WA - 9832BP - 9833BP - 9837BP - 9838BP

Post Top

Sitescape®

SITE • ROADWAY • AREA LIGHTING



9837BP

H: 35 1/2"

W: 15 3/4"

FITTER: 3" I.D.

Finish: Black (BLK)

Hanover®

LANTERN

Handcrafted in America

FEATURES & SPECIFICATIONS

model no. shown: **9832BP**


dimensions: **H: 29 1/4" W: 15 3/4"**

E.P.A.: **1.96**

max. weight: **33 lbs.**

- Cast aluminum turned top with finial.
- Cast aluminum hinged roof for easy relamping.
- Cast aluminum hinged square cage.
- Prismatic polycarbonate panels shown.
- Panels secured to cage with clips and screws.
- Porcelain base 4kv socket. (lamp not supplied)
- Ballast and component parts mounted inside 2 pc. cast aluminum moisture proof ballast housing.
- Three 5/16-18 stainless steel set screws supplied for locking lantern to 3" dia. post or tenon.
- Cast aluminum post fitter slips over 3" dia. post or tenon.
- ETL and cETL listed.

Sitescape
SITE • ROADWAY • AREA LIGHTING

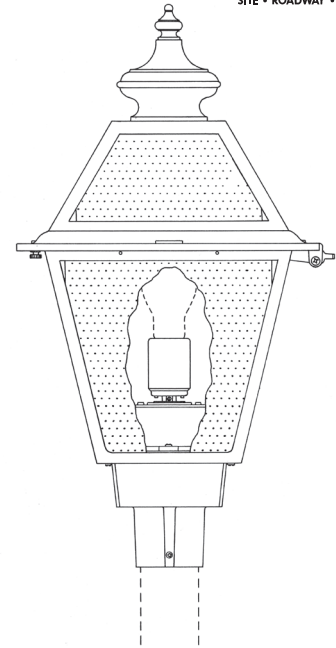

PRODUCT INFORMATION

Order Example:

HPS 9832BP BLK PP 100 120 83 10

- | | | | | | | | |
|--------------------|----------|----------|----------|---------------------------|----------|----------|----------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| 1 Source | | | | 5 Wattage / Socket | | | |
| 2 Model No. | | | | 6 Voltage | | | |
| 3 Finish | | | | 7 Optics | | | |
| 4 Panels | | | | 8 Photoeye | | | |

Source / Wattage / Socket (Med. or Mog.)

Incandescent (INC) - 250W max.
High Pressure Sodium (HPS) - 35W, 50W, 70W, 100W, 150W, 250W
Metal Halide (MH) - 70W, 100W, 150W, 250W
LED - Consult Factory

Finish

All Finishes Available (see page 3)

Panels

CA - Clear Acrylic CP - Clear Polycarbonate
OA - Opal Acrylic OP - Opal Polycarbonate
PP - Prismatic Polycarbonate

Voltage

120, 208, 240, 277

Optics

81 - 6" Refractor Type V83 - 8" Refractor Type V
82 - 6" Refractor Type III 84 - 8" Refractor Type II

Photoeye



10 - 120V only
11 - 208/277V (Must be installed in post only)

PHOTOMETRIC DATA

Symmetric Distribution


Fixture: 9832BP
Lamp: 150w H.P.S.
Lamp Lumens: 16,000

Optics: Type V
Mounting Height: 12'
Panels: Prismatic polycarbonate

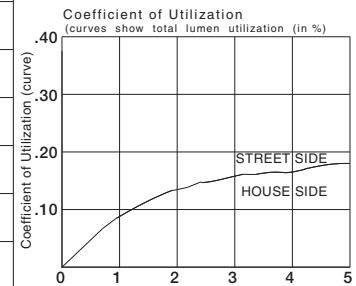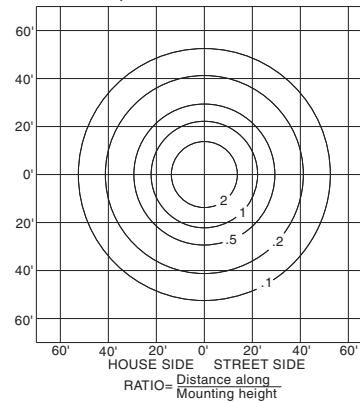

Mounting height multiplier for isolux.					
Mtg.Ht.(ft.)	10'	11'	12'	13'	14'
Correction factor	1.4	1.2	1.0	.86	.73

PRODUCT VISUAL INDEX

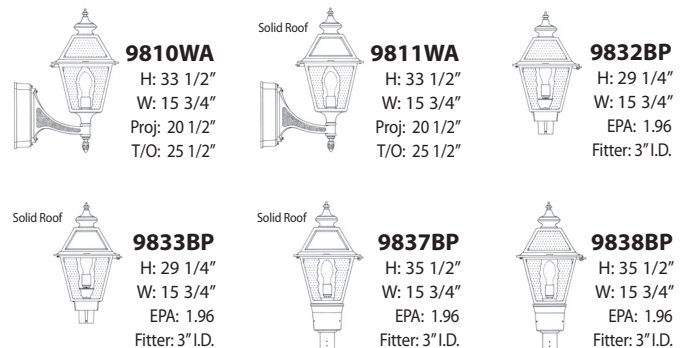

To ensure prompt and efficient processing of your order,
Please follow the sequence listed in the example above.

Hanover
LANTERN
Handcrafted in America